



RECESSED COVER

TYPE D400



APPLICATIONS OF MS ZINC HOT DIPPED



Low visual impact drainage in public and private places:

Pedestrian areas

Private car parks or multi-level car parks

Roads subjected to fire tender loads (urban speed ≤ 40 km/h)

Areas subjected to dock movements

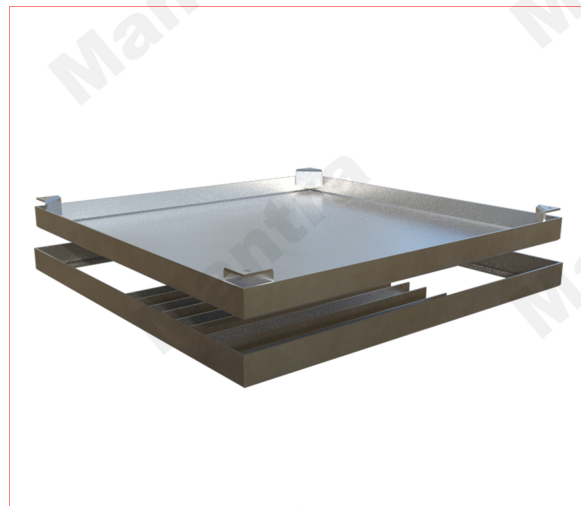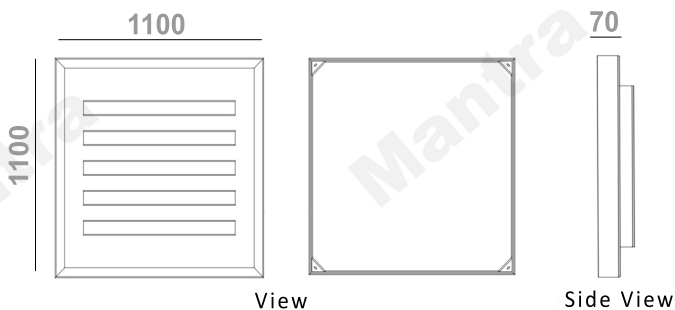

TECHNICAL DATA SHEET FOR RECESSED TILE INSERT CHAMBER COVER

CODE	PRICE ₹	MATERIAL	DIMENSIONS LxH (mm)	WEIGHT (kg)	THICKNESS (mm)	FRAME F1xF2 mm
M22		hot dip galvanised steel DD11(1.0332) ⁵	1100x1100x70	117	5	70x100

SR. NO.	Test	Specification	Specified value	Results Obtained	Remarks
01	Mass Of Zink	IS 4759	610 Gms/m ²	705 to 840 Gms/m ²	Satisfactory
02	Preece Test	IS 2633	4 Dips of 1 min in copper sulphate	No Copper deposits observed	Satisfactory
03	Adhesion Test	IS 2629	6mm impression between two strokes	No Zinc lifted between the impression	Satisfactory
04	Zinc Coating	IS 4759	65 Microns	65 to 70 Microns	Satisfactory
Remarks : Above all Test Done & Satisfactory					
Final results : As galvanized material passed above tests. Hence the quality is accepted					

2- Classifications according American Standard ASTM

5- Classification according to Standard EN 10111 (2008) & symbolic designation according to EN 10027-1 (-2) (2006)

8- Hooking System between the gratings through hooks and holes.

N.B.Sizes and weights are subject to usual manufacturing tolerance values.